

QUARTER TURN ELECTRIC ACTUATORS 25 & 35 N.m

LEA actuators are dedicated to building automation and equivalent applications (HVAC, greenhouses, large swimming pools, ...).




Main features :

- compact
- self-locking output gear
- plug connectors
- non-intrusive setting
- integrated electronic control
- torque limiter
- adjustable mechanical stops
- optical position indicator
- torque protected manual override

SPECIFICATIONS	LEA 2 On - Off	LEA 3 On - Off	LEA 3 Proportional signal control
General specifications			
Maximum torque	25 N.m	35 N.m	35 N.m
Operating time 90°	20s	20s	20s
Flange	F05 - F04	F05 - F04	F05 - F04
Environment / Materials			
Protection	IP65	IP65	IP65
Ambient temperature	-10...+50°C / +14...+122 °F	-10...+50°C / +14...+122 °F	-10...+50°C / +14...+122 °F
Body	Reinforced PA	Reinforced PA	Reinforced PA
Flange and output drive	Metallic	Metallic	Metallic
Motor data			
Duty rating	S4-30%	S4-30%	S4-30%
Power supply (2 versions)	115..230VAC 50-60Hz / 24VAC-DC	115..230VAC 50-60Hz / 24VAC-DC	115..230VAC 50-60Hz / 24VAC-DC
Power consumption max.	35 W approx.	45 W approx.	45 W approx.
Controls & signalling			
Controls	Prewired	Prewired	Input :0-4...20 mA / 0...10 V
Open / closed signalling	2 contacts N.O (250VAC / 2A)	2 contacts N.O (250VAC / 2A)	2 contacts N.O (250VAC / 2A)
Position potentiometer	Option (1 kOhm)	Option (1 kOhm)	NA
Position transmitter	Option (0-20 / 4-20mA)	Option (0-20 / 4-20mA)	Output :0-4...20 mA / 0...10 V
Electrical connections			
Cable entries	2 connectors	2 connectors	2 connectors
Max. wire size	4 x 1,5 mm ² (power supply) 3 x 0,75 mm ² (signals)	4 x 1,5 mm ² (power supply) 3 x 0,75 mm ² (signals)	4 x 1,5 mm ² (power supply) 3 x 0,75 mm ² (signals)
Norms	conform to CE / CSA	conform to CE / CSA	conform to CE / CSA
Heating	Built-in	Built-in	Built-in


At Your Service Over The World

DIMENSIONS, WEIGHT AND STANDARD SOCKET MACHINING

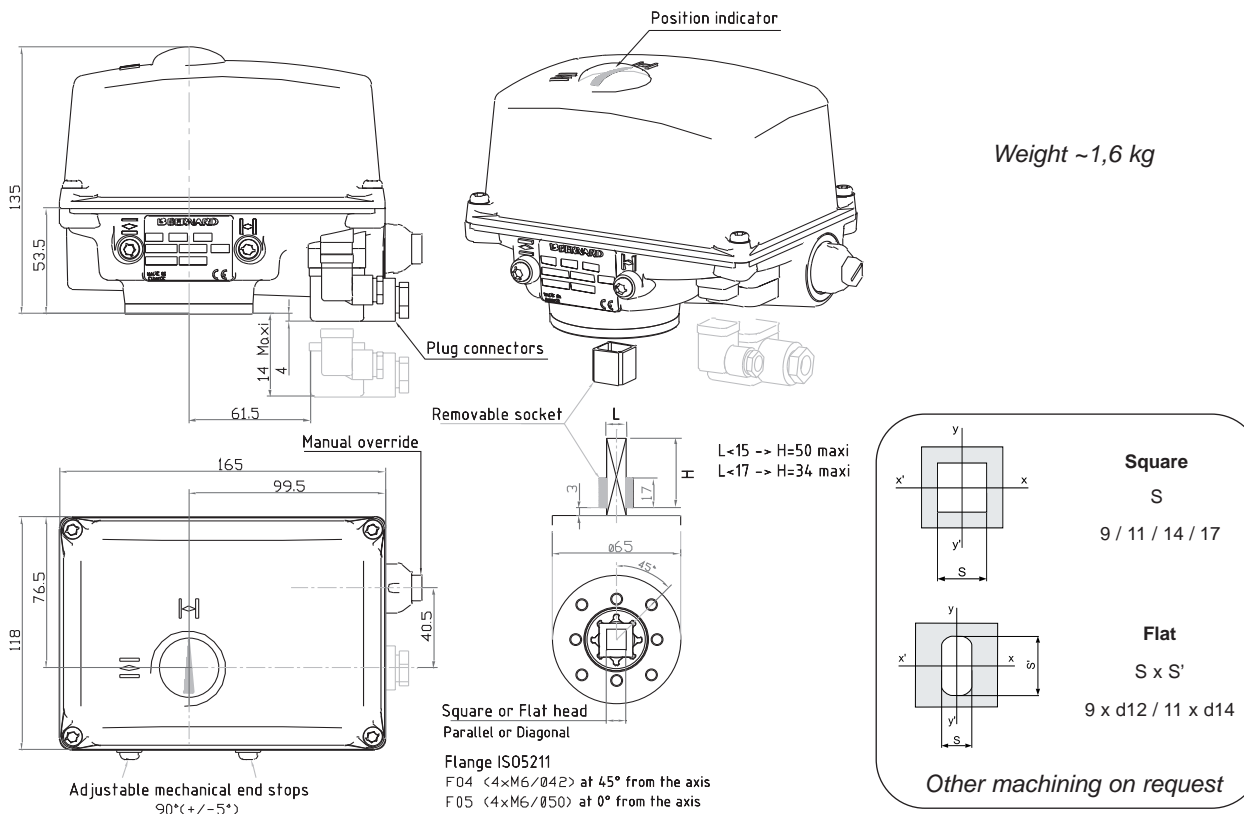

All data in this brochure are given for information only and are subject to change without notice

WIRING DIAGRAMS

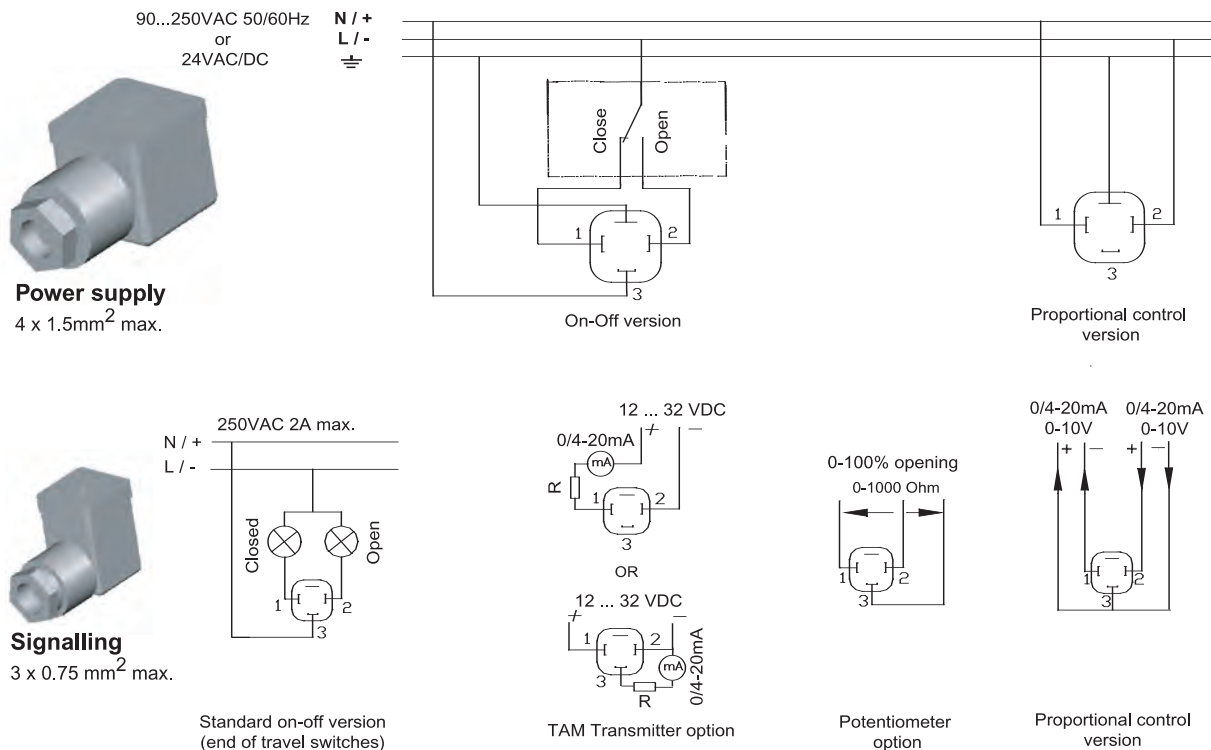

Website: www.bernardcontrols.com / e-mail: bsales@bernardcontrols.com / Tel: 1-281-578-6666